

Major features and hardware compatibility

Support · QL40 OBI-2G - OBI 2nd generation

New user interface (figure 1 & 2)
(see specific OBI40-2G release note for more details)

· QL40 FWSS

Minor features

Sonic tools

- FwsProc : wave reverse amplitude
- FwsProc : cement bond process, added option to select receiver and waveform as outputs (TTX, CBLRXID, CBLWAVEFORMID)
- FwsWave : added option to display the results of the realtime process (figure 3)

Spectral tool

- SgrProc : added deadtime handling for Medusa process

LoggerSettings

- Added manual check tool's operability status

Fixes

- AbiSurfacelmg : display of caliper in inches
- SgrProc : Medusa process : concentrations always positive
- Enel CaliperXY
- SgrSpectra : possible overflow on stacked stabilized spectra

⚠ Minimum Software & firmware requirements

Software

- Wellcad 5.0 build 1103

Firmware

- Matrix: 113-117-100
- Jazzlogger: 109

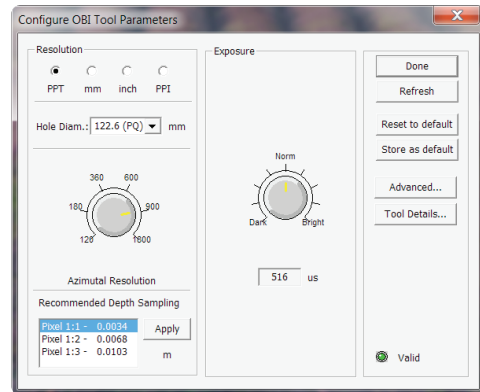


Figure 1 - QL40-OBI tool settings dialog box

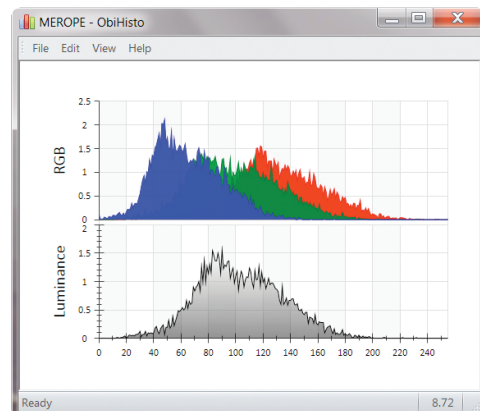


Figure 2 - QL40-OBI luminance and RGB histogram view

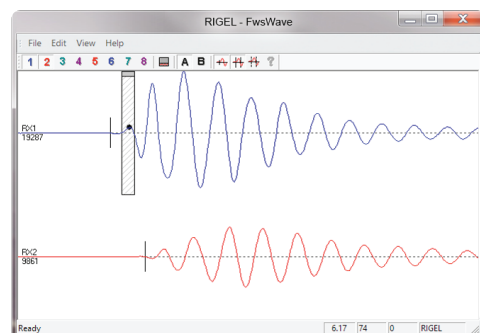


Figure 3